


This document is the property of Amphenol Corporation and is delivered on a non-exclusive basis. It is to be used for the manufacture or sale by anyone other than Amphenol Corporation without the prior consent of Amphenol. No right is granted to disclose or use any information in this document.

| REVISIONS | | DATE | APPROVED |
|-----------|-----------------|----------|----------|
| SYM | EON | | |
| A | INITIAL RELEASE | 09/03/04 | C LOKE |

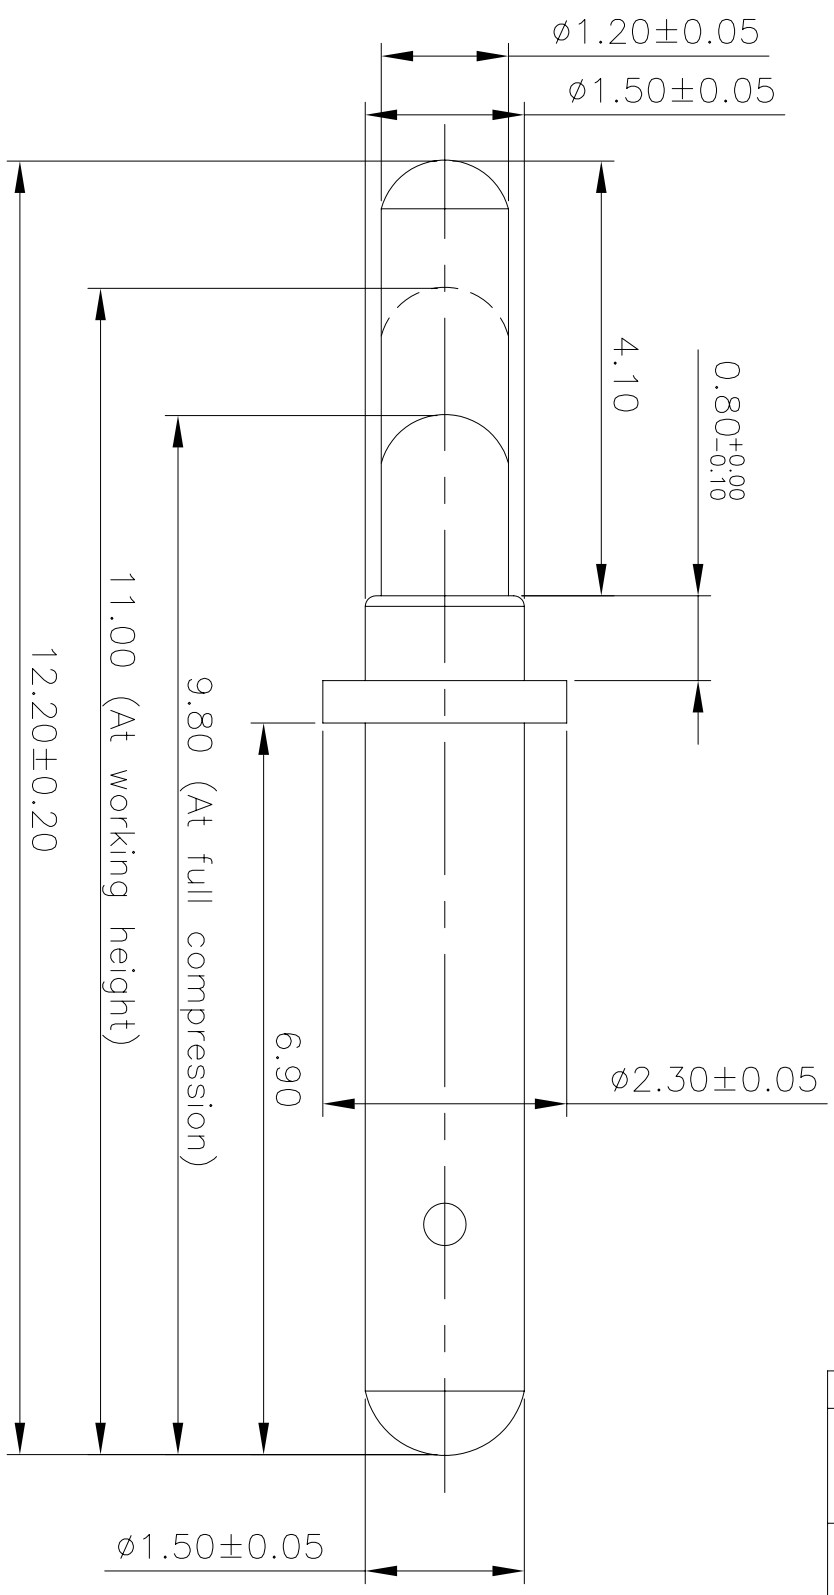

Materials:

- Plunger: Brass, Ni flash underplating, Gold plated 10u”
- Barrel: Brass, Ni flash underplating, Gold plated 10u”
- Spring: SUS304

Mechanical Characteristics:

- Operating Power of Pin
- Full Stroke: 2.4mm
- Spring Force: 100g±20% at 1.2mm stroke

Electrical Characteristics:

- Contact Resistance: <50mOhm

CUSTOMER DRAWING

| | | | |
|---------------------------------------|-------------|--------------------|-----------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | MATERIAL AND COLOR | |
| U.S. METRIC | U.S. METRIC | FINISHES | |
| X | +/- | 0.20 | |
| .XX | +/- | 0.10 | |
| .XXX | +/- | 0.05 | |
| X. | +/- | 1" | |
| DIMENSIONS | | APPROVAL | |
| U.S. (METRIC) | INCHES (MM) | DRAWN | V SOH 09/03/04 |
| | | CHECKED | C LOKE 09/03/04 |
| | | CHECKED | |
| | | DRAWING FILE : | |
| ANGLE OF PROJECTION | | DATE | |
| | | | |
| TITLE | | DRAWING NO. | |
| SINGLE POGO PIN | | A4 | |
| | | SPG-1472-10 | |
| | | SCALE NONE | |
| | | SHEET 1 OF 1 | |
| | | REV. A | |

Amphenol
Amphenol East Asia Limited
Manufacturing Operation